

National Exams December 2014

04-Geol-06, Soil Mechanics

3 hours duration

NOTES:

1. If doubt exists as to the interpretation of any question, the candidate is urged to submit with the answer paper, a clear statement of any assumptions made.
2. This is a CLOSED BOOK EXAM. Candidates may use one of two calculators, the Casio or Sharp-approved models.
3. There are SIX (6) questions in this exam booklet. Each question is worth 20 marks. YOU MUST ANSWER five (5) out of the six (6) questions. The first five (5) questions that appear in the exam booklet will be marked.
4. Where stated in the examination, please hand in any additional pages with your exam booklet.
5. Each question is worth 20 marks. The total number of marks for the exam is 100.


Question 1. Classification

- a. Plot the grain-size curves on Figure Q1 on the next page and classify soils A and B according to the Unified Soil Classification System (USCS). The USCS chart is included in the Useful Information Section at the end of the exam. Soil A has a liquid limit of 9% and a plastic limit of 7%. Soil B has a liquid limit of 70% and a plastic limit of 25%.

20 marks

Table Q1

Metric Sieve Size	US Sieve Size	Percent Finer	
		Soil A	Soil B
75 mm	3 in	100	100
50 mm	2 in	100	100
25 mm	1 in	90	100
19 mm	0.75 in	86	100
9.5 mm	0.375 in	80	100
4.76 mm	No. 4	65	100
2.38 mm	No. 8	50	100
0.84 mm	No. 20	30	100
420 μm	No. 40	15	95
250 μm	No. 60	10	82
150 μm	No. 100	9	80
75 μm	No. 200	6	75

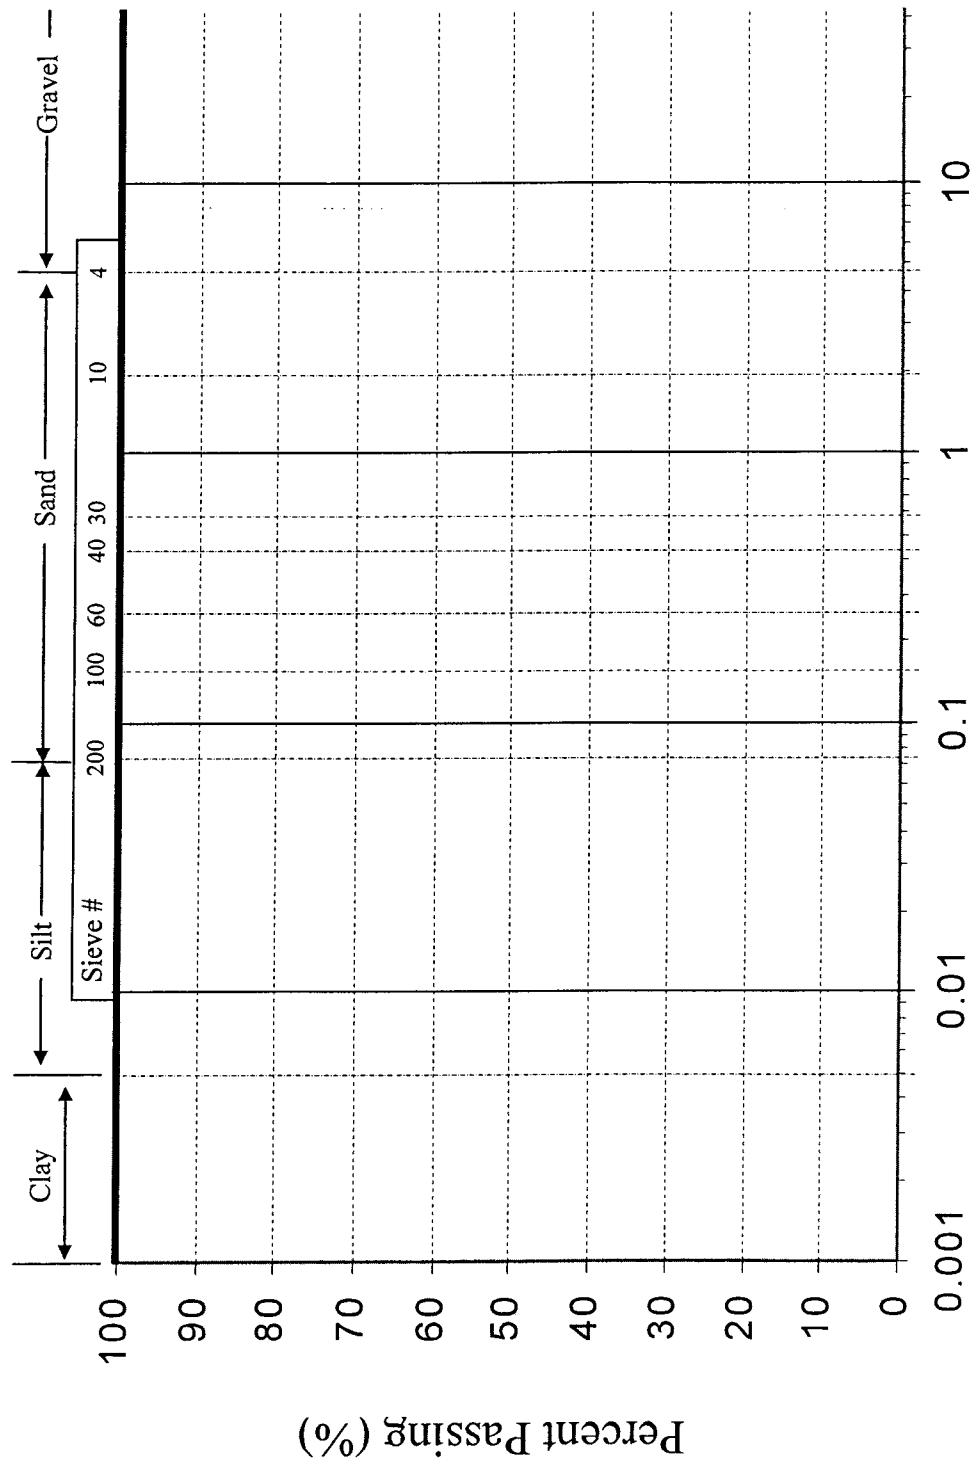

Particle Size(mm)

Figure Q1

Question 2. Soil Physical Properties**20 marks**

- a. A research program is investigating the influence of different pore fluids on the behaviour of a clay soil. Two different pore fluids are used. One pore fluid is distilled water ($\rho_w=1.0\text{g/cm}^3$) and the other is a saline pore fluid ($\rho_w=1.2\text{g/cm}^3$). Two samples with identical dry density and degree of saturation are to be compacted with a diameter of 50mm and height of 100mm. The samples are to have 85% saturation and a 1.65g/cm^3 dry density. The specific gravity of the soil particles is 2.65.
- i. Calculate the mass of pore fluid and mass of dry soil for the sample with distilled water ($\rho_w=1.0\text{g/cm}^3$).
 - ii. Calculate the mass of pore fluid and mass of dry soil for the sample with saline pore fluid ($\rho_w=1.2\text{g/cm}^3$).

Question 3. Lateral earth Pressures / Slope Stability

- a. Explain the "at rest", "active" and "passive" earth pressure coefficients. Give an example of each type of earth pressure.
- b. Describe the general approach common to all limit equilibrium methods of slope stability analysis.

10 marks**10 marks**


Question 4. Consolidation**20 marks**

- a. A building is to be constructed on a stratum of the clay 7 m thick for which consolidation test revealed that the compression index $C_c = 0.32$, recompression index $C_r = 0.065$, initial void ratio $e_0 = 0.864$, and preconsolidation stress, $\sigma'_p = 310\text{kPa}$. The average existing effective overburden pressure on this clay stratum is 126 kPa. The average applied pressure on the clay after construction of the building is 285 kPa.
 - i. Estimate the decrease in thickness of the clay stratum caused by full consolidation under the building load.
 - ii. Estimate the decrease in thickness due to the building load if the clay had never been consolidated under a load greater than the existing overburden.
- b. Assuming the settlement analysis for this proposed structure indicates that the underlying clay layer will settle 10 cm in 2 years and that ultimately the total settlement will be about 50 cm. However, this analysis is based on the clay layer being doubly drained. It is suspected that there may be no drainage at the bottom of the layer. Assuming that $C_v = 2.41 \cdot 10^{-4} \text{ cm}^2/\text{s}$.
 - i. How will the total settlement change from the double to the single drainage case ? show all the equations
 - ii. How long will it take for 10 cm of settlement to occur if there is only single drainage?
 - iii. How long will it take for 10 cm of settlement to occur if there is double drainage?

Question 5. Seepage**20 marks**

Refer to the dam and the flow net shown in **Figure Q5**: $L = 30 \text{ m}$, $H = 20 \text{ m}$, $h_t = 10 \text{ m}$, $D = 3 \text{ m}$, $\gamma_{\text{sat}} = 21.3 \text{ kN/m}^3$, $\gamma_w = 9.81 \text{ kN/m}^3$ and points a, b, c, d and e are 7.5 m apart, find:

- The rate of seepage volume under the dam per unit length if $k = 3 \times 10^{-3} \text{ cm/s}$.
- Total, effective, and pore water pressure at points A, B, C, and D, assuming that $z_A = 10 \text{ m}$, $z_B = 15 \text{ m}$, $z_C = 6 \text{ m}$ and $z_D = 9 \text{ m}$.
- Draw the pore water pressure diagram along the base of the dam between 1 and 5 based on pore water pressure values at 1, 2, 3, 4 and 5. Calculate the total uplift force between 1 and 5.

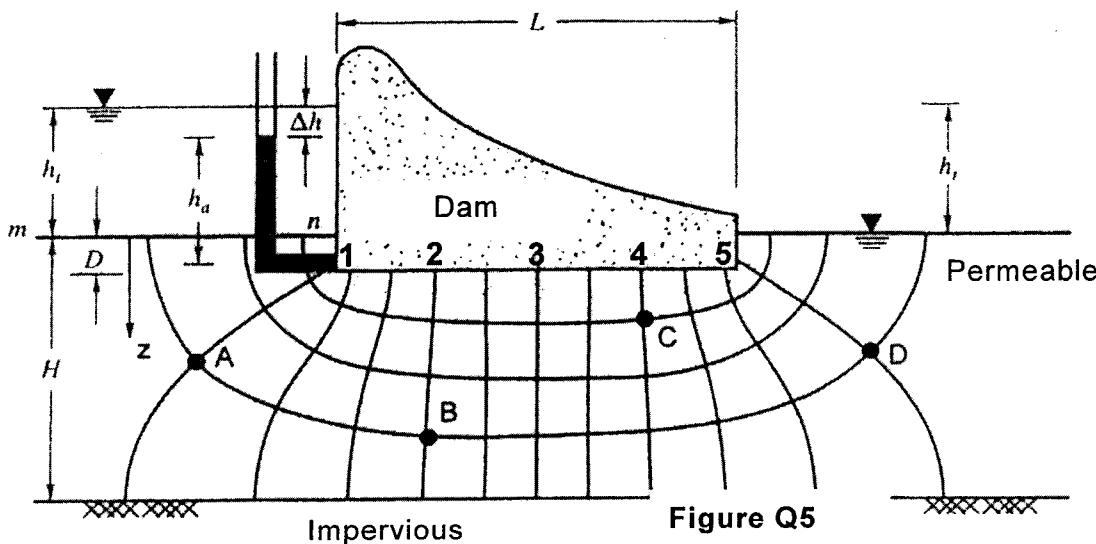

Question 6. General Questions**5 marks each**

- a. List the equation for Darcy's law and describe its components.
- b. Soil behaviour is affected by water content. Describe the change in strength and stiffness of a clay soil based on its water content and relate it to consistency (Atterberg) limits.
- c. A falling head test was performed on a soil. The soil specimen was 5 cm diameter and 10 cm tall. The head in the 5 mm diameter burette fell from 1.25 m to 1.15 m in 35 minutes.
 - a) Calculate the conductivity of the soil in centimeters per second.
 - b) What type of soil was being tested?
- d. A soil has gravimetric water content of 15%, void ratio of 0.54 and specific gravity of 2.6. Calculate the soil's dry density, volumetric water content and degree of saturation.

USEFUL INFORMATION

$$C_u = \frac{D_{60}}{D_{10}}$$

$$C_c = \frac{(D_{30})^2}{D_{10} D_{60}}$$

$$N_{corrected} = 100\% \frac{N - N_{fines}}{100 - N_{fines}}$$

$$I_p = 0.73(w_L - 20)$$

$$I_D = \frac{e_{max} - e}{e_{max} - e_{min}}$$

$$I_L = \frac{w - w_p}{w_L - w_p}$$

$$Activity = \frac{w_L - w_p}{\% clay}$$

$$\rho_d = \frac{\rho_t}{(1+w)}$$

$$\rho' = \rho_{sat} - \rho_w$$

$$n = \frac{e}{1+e}$$

$$Se = wG_s$$

$$h_t = h_e + h_p = z + \frac{u}{\gamma_w}$$

$$i = \frac{\Delta h}{L}$$

$$v = ki$$

$$k = \frac{\gamma_w}{\eta} K$$

$$\nu_s = \frac{v}{n}$$

$$q = vA = kiA$$

$$q = k\Delta h \frac{N_f}{N_d}$$

$$k = \frac{aL}{A\Delta t} \ln \frac{h_1}{h_2} = 2.3 \frac{aL}{A(t_2 - t_1)} \log \frac{h_1}{h_2}$$

$$k = QL/hA$$

$$k_N = \frac{H}{\left(\frac{H_1}{k_1} + \frac{H_2}{k_2} + \frac{H_3}{k_3}\right)}$$

$$k_p = \frac{k_1 H_1 + k_2 H_2 + k_3 H_3}{H}$$

$$p = \frac{\sigma_1 + \sigma_3}{2}$$

$$q = \frac{\sigma_1 - \sigma_3}{2}$$

Force \rightarrow Newton (N) $\rightarrow 1 N = 1 \text{ kg m/s}^2$
 Pressure \rightarrow Pascal (Pa) $\rightarrow 1 \text{ Pa} = 1 \text{ N/m}^2$
 $\rightarrow 1 \text{ kPa} = 1 \text{ kN/m}^2$

$$\Delta u = B[\Delta \sigma_3 + A(\Delta \sigma_1 - \Delta \sigma_3)]$$

$$\tau_{rupt} = c' + \sigma' \tan \phi'$$

$$\sigma' = \sigma - u$$

$$\psi' = \arctan (\sin \phi') \quad a = c' \cos \phi'$$

$$T = \frac{c_v t}{H_{dr}^2} \quad c_v = \frac{k}{m_v \gamma_w}$$

$$\Delta H = C_r \left(\frac{H_o}{1+e_o} \right) \log \frac{\sigma'_{p'}}{\sigma'_{vo}} + C_c \left(\frac{H_o}{1+e_o} \right) \log \frac{\sigma'_{vf}}{\sigma'_{p'}}$$

$$T = \frac{\pi}{4} \left(\frac{U}{100} \right)^2 \quad U < 60\%$$

$$T = 1.781 - 0.933 \log(100 - U) \quad U > 60\%$$

FIELD IDENTIFICATION PROCEDURES (Excluding particles larger than 75 mm and bedding fractions on estimated mass)		Gp Sym	TYPICAL NAMES	INFORMATION REQUIRING SOILS	LABORATORY CLASSIFICATION CRITERIA
GRAVELS MORE THAN HALF OF COARSE FRACTION IS LARGER THAN 4.75 mm	CLEAN GRAVELS (little or no fines)	Wide range in grain size & substantial amounts of all intermediate particle sizes Predominantly one size of a range of sizes with some intermediate sizes missing	GW POORLY GRADED GRAVELS, GRAVEL-SAND MIXTURES, LITTLE OR NO FINES	GIVE TYPE, NAME, IF NECESSARY, INDICATE APPROX % OF SAND & GRAVEL; MAX. SURFACE ANGULARITY, SURFACE CONDITION & HARDNESS OF GRAINS, LOCAL OR GEOLOGIC NAME & OTHER PERTINENT DESCRIPTIVE INFORMATION; & SYMBOL IN PARENTHESES	DETERMINE PERCENTAGES OF GRAVEL & SAND FROM GRAIN SIZE CURVE, DEPENDING ON PERCENTAGE OF FINES (FRACTION SMALLER THAN 75 μm) COARSE GRAINED SOILS ARE CLASSIFIED AS FOLLOWS: $C_u = \frac{D_{10}}{D_{30}}$ $C_c = \frac{(D_{10}/D_{30})^2}{D_{30}}$
GRAVEL WITH FINES (appreciable amount of fines)		Non-plastic fines (for identification procedures see ML below) Plastic fines (for identification procedures see CL below)	GP SILTY GRAVELS, POORLY GRADED GRAVEL-SAND-SILT MIXTURES CLAYEY GRAVELS, POORLY GRADED GRAVEL-SAND-CLAY MIXTURES	GIVE TYPE, NAME, IF NECESSARY, INDICATE APPROX % OF SAND & GRAVEL; MAX. SURFACE ANGULARITY, SURFACE CONDITION & HARDNESS OF GRAINS, LOCAL OR GEOLOGIC NAME & OTHER PERTINENT DESCRIPTIVE INFORMATION; & SYMBOL IN PARENTHESES	NOT MEETING ALL GRADATION REQUIREMENTS FOR GW ABOVE A-LINE WITH 1 ^o BETWEEN AND 7 ^o BELOW A-LINE, OR ATTERBERG LIMITS BELOW A-LINE, OR ATTERBERG LIMITS ABOVE A-LINE WITH 1 ^o >7 ^o
SANDS MORE THAN HALF OF COARSE FRACTION IS SMALLER THAN 4.75 mm	CLEAN SANDS (little or no fines)	Wide range in grain size & substantial amounts of all intermediate particle sizes Predominantly one size of a range of sizes with some intermediate sizes missing	SW WELL GRADED SANDS, LITTLE OR NO FINES	FOR UNDISTURBED SOILS ADD INFORMATION ON STRATIFICATION, DEGREE OF COMPACTNESS, CEMENTATION, CEMENTATION, MOISTURE CONDITIONS & DRAINAGE CHARACTERISTICS	NOT MEETING ALL GRADATION REQUIREMENTS FOR SW ABOVE A-LINE WITH 1 ^o BETWEEN AND 7 ^o BELOW A-LINE, OR ATTERBERG LIMITS BELOW A-LINE, OR ATTERBERG LIMITS ABOVE A-LINE WITH 1 ^o >7 ^o
SANDS WITH FINES (appreciable amount of fines)		Non-plastic fines (for identification procedures see ML below) Plastic fines (for identification procedures see CL below)	SP SILTY SANDS, POORLY GRADED SAND-SILT MIXTURES CLAYEY SANDS, POORLY GRADED SAND-CLAY MIXTURES		
IDENTIFICATION PROCEDURES ON FRACTION SMALLER THAN 425 μm					
LIMIT LESS THAN 35%	LIQUID LIMIT	DRY STRENGTH (CRUSHING CHARACTERISTICS)	DILATENCY (REACTION TO NEAR PLASTIC LIMIT)	TOUGHNESS (CONSISTENCY NEAR PLASTIC LIMIT)	
SILTS AND CLAYS	LIQUID LIMIT BETWEEN 35% AND 50%	NONE MEDIUM HIGH	QUICK SLOW SLOW TO QUICK NONE TO SLIGHT HIGH	NONE MEDIUM SLOW SLIGHT MI MEDIUM TO HIGH	GIVE TYPE, NAME, IF NECESSARY, INDICATE DEGREE & CHARACTER OF PLASTICITY, AMOUNT & MAXIMUM SIZE OF COARSE GRAINS, COLOUR IN WET CONDITION, ODOUR, IF ANY, LOCAL OR GEOLOGIC NAME & OTHER PERTINENT INFORMATION & SYMBOL IN PARENTHESES
	LIQUID LIMIT GREATER THAN 50%				FOR UNDISTURBED SOILS AND INFORMATION ON STRUCTURE, STRATIFICATION, CONSISTENCY IN UNDISTURBED & REMOULDED STATES, MOISTURE & DRAINAGE CONDITIONS
HIGHLY ORGANIC SOILS		IDENTIFIED BY COLOUR, ODOUR, SPONGY FEEL & FREQUENTLY BY FIBROUS TEXTURE			
FINE GRAINED SOILS MORE THAN HALF OF MATERIAL IS SMALLER THAN 75 μm					
COARSE GRAINED SOILS MORE THAN HALF OF MATERIAL IS LARGER THAN 75 μm					